

Groundwater quality for Irrigation- A study based a GIS Science at upper thirumanimuthar River, Tamilnadu, India

M. Vijay Prabhu, S.A.Palanisamy and M.Suresh

Department of Geology, Periyar University, Salem – 11, Tamil Nadu.

geo_vijay@rediffmail.com

Abstract

In the present paper, an attempt has been made to work out the groundwater suitability for irrigation representing from a total area of about 340.46 km² in upper Thirumanimuthar sub-basin, Cauvery River. The 51 groundwater samples were collected are 51 during pre monsoon (May) 2007 and were analysed for major cations and anions. The groundwater samples were collected at 51 locations during pre monsoon season (May) 2007 period and were analyzed for major cations and anions. EC, Kelley's ratio, SAR values, Mg-Hazards, HCO₃ and RSC calculation were used to assume the suitability of the groundwater for irrigational purpose. The study has shown salinity of groundwater under "increasing problem" zone at majority of sites. The data were interpreted using Wilcox and USSSL Classifications. The groundwater samples fall under good to permissible (Wilcox Diagram) zone. The SAR values were plotted in the USSSL staff diagram and found most of the groundwater samples belongs to C₃-S₁ (58.82%). These results were taken into GIS platform, to prepare the spatial distribution maps. Finally GIS output maps result reveals that 181.5 Km² areas fall in (Wilcox) Good to Permissible category and 213.68 Km² area falls in (USSSL) C₃-S₁ category. Above said areas indicate that the groundwater could be used for all types of crops.

Key words: Irrigation, salinity, Wilcox, USSSL (U.S. Salinity Laboratory diagram), SAR (Sodium Adsorption Ratio), spatial distribution map.

Introduction

Groundwater is a key resource in much uses of the world. Irrigation provides the foundation for reliable agricultural production and regional economic security (Hillel, 2000; Tanji, 1990). It is well documented that environmental pollution depends mainly on human activities (industry, agricultural cultivations, and domestic use) and to a lesser extent, to other natural phenomena, which contribute to this, like volcanoes, earthquakes (Drever, 1997). The suitability of irrigation water depends upon many factors including the quality of water, soil type, salt tolerance characteristics of the plants, climate and drainage characteristics of the soil (Michael, 1990). Groundwater always contains small amount of soluble salts dissolved in it. The kind and quality of these salts depend upon the sources for recharge of the groundwater and the strata through which it flows. The excess quantity of soluble salts may be harmful for many crops. Hence, a better understanding of the chemistry of groundwater is very essential to properly evaluate

groundwater quality for irrigation purpose. In the present study, Groundwater quality for irrigation was investigated in the upper Thirumanimuthar Sub-Basin, Cauvery River basin in pre monsoon season (May) 2007, to identify the suitable and unsuitable zone for irrigation uses of groundwater quality using GIS technology

Study Area

The part of upper Thirumanimuthar sub-basin, central Tamilnadu, India has been selected for the present investigation. It lies between 11°31'57" and 11°48'05" N latitudes and 78°02'33" and 78°21'13" E longitudes, covering an area of 346.40 Km² (Fig.1). The study area falls in Salem district of central Tamil Nadu. The major source for groundwater in the area is rainfall during monsoon. The average annual rainfall is about 852 mm. The study area is underlaid by the Archaean crystalline rocks surrounded by hills such as Shevaroy (1033 m) and Nagaramalai (619 m) on north, Jarugumalai (583 m) on the south, Kanjamalai (883 m) on the west, and Goudamalai (568 m) on the east.

Methodology

The study area base map was prepared from Survey of India toposheets 58 I/1, 2, 5 and 6 of 1:50,000 scale. Using drainages the boundary was demarcated (Upper Thirumanimuthar) and sample locations in GIS environment. The 51 groundwater samples from various locations also were located in the upper Thirumanimuthar Sub-basin area were collected from open wells (Shallow depth) during pre-monsoon season (May 2007). The locations of groundwater sampling stations are shown in Fig. 1. The groundwater samples were collected from open wells, which are being extensively utilized for drinking and irrigation purposes. pH and Electrical Conductance were measured within a few hours by using Elico pH meter and conductivity meter. Ca and Mg were determined titrimetrically using standard EDTA method and chloride was determined by silver nitrate titration (Vogel, 1968) method. Carbonate and bicarbonate were estimated with standard sulphuric acid. Sulphate was determined a gravimetrically by precipitating BaSO₄ from BaCl₂. Na and K were determined by Elico flame photometer using APHA, 1996 procedure. Analyzed groundwater chemistry results are given in Table 1.

Results and Discussion

Salinity

This analysis has shown that thirteen samples fall under "severe problem" category (Table 2). The high salinity at these few sites may be due to domestic pollution caused in the rural areas associated with limited use/abandoned nature of wells. 72.5% of the samples fall under "increasing problem" category respectively.

Sodium Adsorption Ratio

The sodium or alkali hazard in groundwater for irrigation is determined by the absolute and relative concentration of cations and is expressed in terms of Sodium Adsorption Ratio (SAR). There is a significant relationship between SAR values of irrigation water and the extent to which sodium is absorbed by the soil. If groundwater used for irrigation is high in sodium and low in calcium, the cation-exchange complex may become saturated with sodium.

$$SAR = \frac{Na + K}{Ca + Mg} \times 100 \quad (3)$$

(All ions in epm)

A simple method of evaluating the high sodium in

water is the Sodium Adsorption Ratio. (SAR). Calculation of SAR value for a given groundwater provides a useful index of the sodium hazard of that water for soils and crops. A low SAR value of 2 to 10 indicates little danger from sodium; medium hazards are between 10 to 18, high hazards are between 18 to 26 and very high hazards are above 26. The lower the value of SAR in the groundwater samples of the study area ranges from 0.18 to 10.91 during pre-monsoon season (Table 1). Majority of the samples in the study area falls under the category of low sodium hazards except is one sample. The high sodium water may produce harmful levels of exchangeable sodium in most soils and requires special soil management, like good drainage, high leaching and organic matter addition.

Wilcox Diagram

Wilcox (1955) used sodium % and specific conductance in evaluating the suitability of groundwater to irrigation. Sodium-percentage determines the ratio of sodium to total cations viz., sodium, potassium, calcium and magnesium. All concentration values are expressed in equivalents per million.

$$Na\% = \frac{Na}{Ca + Mg + Na + K} \times 100$$

The results (Table 3) show that the groundwater near the upstream is good for irrigation and the contamination are found to be high near the downstream (Fig.2). This may be due to the effluents from the industries as well as the domestic sewages directed into the river.

Above said results were taken in to GIS environment for spatial distribution map preparation. The spatial distribution map results are given in the Table 4. In the present investigation, the spatial distribution map (Fig.3) indicates that the "Good to permissible" covers 181.51 Km².

USSLDIAGRAM

U.S. Salinity Laboratory diagram (1954) interpretation is given in the Fig.4. The two most significant parameters of sodium and salinity hazards indicate us ability for agricultural purposes. USSL classification of groundwater in the study area is given in Table 5. Thirty sites (58.82 percent) samples occur within C₃-S₁

category. This category is predominant in the study area and accordingly it is suitable for irrigations purposes.

In the USSL diagram results 16 fields based on USSL classification suitable weightages are given as C_1S_1 , C_1S_2 , C_1S_3 , and C_1S_4 etc. These suitability results were taken in to GIS environment for spatial distribution map preparation. The spatial distribution results are given in Table 6. This spatial distribution map (Fig.5) results of C_3-S_1 (213.68 Km^2) class is good and could be used for all types of crops.

CONCLUSION

In this study, the assessment of groundwater for irrigation has been performed on the basis of various guidelines. The Wilcox classification has shown 56.86% of groundwater samples and spatially an area 181.51 Km^2 under "Good to Permissible" category. However, another classification has shown salinity of groundwater under "Increasing Problem" zone at 72.5% sites during the study period respectively. According to U.S. Salinity Laboratory diagram, the majority of groundwater samples belongs to C_3-S_1 (High Salinity – Low SAR) category and spatially covers an area 213.68 Km^2 under "Suitable" zone. In the present study, it is evident that high salinity of groundwater persists at majority of sites. Hence, for high to very high salinity of waters, soil must be permeable with adequate drainage facilities for satisfactory crop growth.

REFERENCE

- SAPHA (American Public Health Association).** Standard methods for the Examination of water and wastewater, 19th eds. Public Health Association, Washington, DC., (1996)
- Ayers, R.S.,** Quality of Water for Irrigation, J. Irrigation and Drainage Div., ASCE, Vol. 103, No. IR2, Pp. 135-154 (1977).
- Hillel, D.,** Salinity management for sustainable irrigation, integrating science, environment and economics. World Bank, Washington, DC (2000).
- Drever, J.,** The Geochemistry of Natural Waters: Surface and Groundwater Environments, Prentice-Hall, Upper Saddle River, (1997).
- Michael, A.M.,** Irrigation: Theory and Practice, Vikas Publishing House Pvt. Ltd., New

Delhi, pp. 801 (1990).

Tanji, K.K., Agricultural Salinity Assessment and Management. American Society of Civil Engineers, New York (1990)

U.S. Salinity Laboratory., Diagnosis and Improvement of saline and alkali soils. U.S. Dept. Agriculture Hand Book – 60, Washington D.C. Pp. 160 (1954)

Vogel, A.I., A Text Book of Quantitative Inorganic Analysis including Elementary Instrumental Analysis. 3rd Edn., ELBS/Longman, Pp. 121 (1968)

Wilcox L.V Classification and use of irrigation waters. US Department of Agriculture, Arc 969, Washington DC (1955)

Sample No.	Ca	Mg	Na	K	HCO ₃	CO ₃	SO ₄	Cl	pH	EC*	TDS	K. Ratio	RSC*	SAR*	Na%	Mg-Hazards
1	4.4	2.1	4.3 5	0.0 5	4.9	00	1	5	7.5	110 0	588	0.67	-1.6	2.41	47.2 9	32.31
2	5	7.9	5.6 5	0.2 3	9	00	2.6 9	8.2 5	7.4	190 0	102 6	0.44	-3.9	2.22	41.4 5	61.24
3	5	9.2	9.5	0.1 8	7.4	00	4.1 3	12. 5	7.6	240 0	130 0	0.67	-6.8	3.57	51.5 4	64.79
4	2	9.5	4.3 5	0.0 8	4.5	00	3.9 4	7.5	7.7	160 0	849	0.38	-7.0	1.81	39.8 7	82.61
5	8	11	9.7 5	0.5 6	9.4	00	7.0 6	12. 5	7.9	290 0	159 9	0.52	-9.2	3.20	45.9 8	56.99
6	3	5.9	0.4 3	0.3 1	3	0.7	2.5	3.7 5	8.5	100 0	518	0.05	-5.2	0.20	14.3 0	66.29
7	9.2	1.3	3.2 5	0.0 8	8.3	00	1.6 3	4	7.6	140 0	746	0.31	-2.2	1.42	28.0 1	12.38
8	6.4	11	1.7 8	0.2 3	10	00	2.6 9	6.2 5	7.2	190 0	956	0.11	-6.9	0.61	16.3 2	62.13
9	4.5	10	8.1 7	0.2 3	9	00	3.9 4	10	7.2	230 0	122 2	0.56	-5.5	3.03	48.1 8	68.97
10	5.1	4.3	0.4 8	0.0 5	5.6	00	1.6 3	2.7 5	7.7	100 0	511	0.05	-3.8	0.22	7.76	45.74
11	6.2	4.3	15. 3	0.0 8	9.4	00	4.5 6	12	7.3	260 0	145 6	1.45	-1.1	6.66	66.7 2	40.95
12	6.4	5.3	5.1 7	0.1	4.4	0.7	1.6 3	10. 3	8.3	170 0	910	0.44	-6.6	2.14	38.9 3	45.30
13	3	6.4	7.4	0.1 3	4.9	00	3.3 1	8.7 5	7.5	170 0	929	0.79	-4.5	3.41	55.9 6	68.09
14	8.1	2.1	2.5	0.1 3	5.8	00	1.8 4	5.2	7.4	130 0	697	0.25	-4.4	1.11	24.9 9	20.59
15	4.5	3.8	5.4 5	0.1 3	5.6	00	3.1 3	5.2 5	7.7	140 0	771	0.66	-2.7	2.68	48.8 8	45.78
16	2	6.6	0.9	0.2	5.8	0.4	1.2	2.5	8.0	100	487	0.11	-2.4	0.46	21.1	76.74
17	6.5	6.7	1.5 7	0.1 3	5.8	00	2.8 8	6.2 5	7.3	150 0	786	0.12	-7.4	0.61	16.2 9	50.76
18	4	3.2	3.7	0.0 5	3.5	00	2.5	5	7.7	110 0	608	0.51	-3.7	1.95	42.2 3	44.44
19	5.6	4	14. 3	0.1 5	6.1	00	4.5 6	13. 3	7.1	240 0	136 6	1.48	-3.5	6.50	67.4 7	41.67
20	5.3	3.8	5	0.8 2	7.8	00	2.2 5	5	7.9	150 0	818	0.55	-1.3	2.34	49.1 1	41.76
21	6.4	3	7.4	0.0 8	5.6	00	2.8 8	8.5	7.6	170 0	945	0.79	-3.8	3.41	51.2 7	31.91
22	9.5	6.5	3.7	0.0 8	7.3	00	4.1 3	8.5	7.2	200 0	107 6	0.23	-8.7	1.31	24.6 7	40.63
23	8	1.6	3.2 5	0.0 8	6.8	00	1.2 5	5	7.3	130 0	698	0.34	-2.8	1.48	30.2 3	16.67
24	4.5	5.2	0.8 3	0.0 8	5.2	00	2.0 6	3.7 5	7.8	110 0	563	0.09	-4.5	0.38	12.6 5	53.61
25	7.4	9.9	4.3 5	0.3 1	8.9	00	3.1 3	10	7.5	220 0	115 2	0.25	-8.4	1.48	29.4 5	57.23
26	5.2	2	0.3 5	0.0 3	2.9	00	1.2 5	3.7 5	7.6	800	417	0.05	-4.3	0.18	6.70	27.78
27	8	2.4	2.4	0.0 8	7.5	00	2.2 5	3.2	7.1	130 0	694	0.23	-2.9	1.05	23.5 4	23.08
28	9.6	5.9	4.3 9	0.0 8	6.7	00	3.3 1	10	7.2	200 0	108 2	0.28	-8.8	1.58	28.2 7	38.06
29	5.5	12	14. 3	0.2 6	7.6	00	4.3 8	20	7.6	320 0	173 8	0.82	-9.7	4.85	57.1 2	68.21
30	6.7	18	28. 3	0.3 3	12.5	00	2.8 8	37. 5	7.5	530 0	285 4	1.16	-11.9	8.09	65.4 7	72.54
31	15	2	13. 7	0.4 1	9.5	00	3.9 4	17. 5	7.2	310 0	174 6	0.82	-7.3	4.73	50.7 8	11.90
32	31	34	7.4	0.6 4	9.2	00	6.2 5	57. 7	7.1	730 0	384 4	0.11	-55.4	1.30	15.9 7	52.48
33	9	11	18.	0.6	9.4	00	4.5	25	7.4	390	214	0.93	-10.4	5.88	59.0	54.55

34	2.2	4.1	16.3	0.44	15	00	2.25	5.71	7.4	2300	1244	2.58	8.7	9.16	80.63	65.08
35	4.7	8	6.8	0.5	12.8	00	2.25	5	7.7	2000	1036	0.54	0.1	2.70	47.89	62.99
36	5.1	5.4	25	0.41	11.6	00	3.13	21.3	7.7	3600	2010	2.38	1.1	10.91	77.88	51.43
37	8.9	3.8	18.5	0.46	12.2	00	3.5	16.3	7.4	3200	1777	1.46	-0.5	7.34	66.39	29.92
38	26	22	22.6	0.67	13.3	00	2.69	55	7.3	7100	3805	0.47	-34.4	4.63	41.12	46.33
39	2.2	7.2	18.5	0.08	9.5	1.2	4.75	12.5	8.2	2800	1552	1.97	1.3	8.53	76.50	76.60
40	2.2	11	0.61	0.54	7.1	00	1.88	5	8.0	1400	688	0.05	-5.7	0.24	16.89	82.81
41	7.2	19	3.5	0.33	10	00	3.31	16.8	7.6	3000	1521	0.13	-16.2	0.97	19.93	72.52
42	6	21	8.75	0.21	10.4	00	4.56	21	7.3	3600	1860	0.32	-16.6	2.38	35.80	77.78
43	5.5	6	3.37	0.08	6	00	2.25	6.75	7.6	1500	791	0.29	-5.5	1.41	30.57	52.17
44	3.5	5.4	1.95	0.08	4.4	00	1.63	5	7.7	1100	571	0.22	-4.5	0.92	26.11	60.67
45	4.2	15	7.04	0.18	9	00	4.38	12.5	7.7	2600	1353	0.37	-9.8	2.30	39.23	77.66
46	5.4	5	3.25	0.31	7	0.4	1.63	5	8.1	1400	733	0.31	-3.0	1.43	33.95	48.08
47	2.8	3.2	0.78	0.13	4.5	00	0.79	1.75	7.2	700	353	0.13	-1.5	0.45	19.50	53.33
48	6.7	7.3	16.3	0.67	10.6	00	2.88	17.5	7.9	3100	1699	1.16	-3.4	6.14	64.20	52.14
49	10	13	5.26	0.59	9	00	5	15	7.8	2900	1546	0.23	-14.0	1.55	28.53	55.22
50	10	4.7	3.9	0.1	8.5	00	3.6	6.8	7.3	190	102	0.26	-6.4	1.43	26.6	31.54

EC* – Electrical conductivity, RSC* – Residual Sodium Carbonate, SAR* – Sodium Adsorption Ratio.

Table 1. Anions & Cations Concentration in Groundwater Samples (All values in the table are expressed in epm except EC in μScm^{-1} and pH)

Table 2. Salinity Levels of Groundwater Samples of Upper Thirumanimuthar (Ayers 1977)

Salinity Zone (EC, μScm^{-1})	Effects	Sample Numbers (Locations samples)	Percentage (%)
0-750	No Problem	47	2
750-2750	Increasing Problem	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,34,35,40,43,44,45,46,50,51.	72.5
Above 2750	Severe Problem	29,30,31,32,33,36,37,38,39,41,42,48,49.	25.5

Table 3. Classification of Irrigation Groundwater Based on Wilcox Diagram Interpretation (1955)

Category of Irrigation Water	Pre (Locations samples)	Monsoon	Percentage (%)
Excellent to Good	-		-
Good to Permissible	1,2,4,6,7,8,10,12,14,15,16,17,18,20,21,22,23,24,26,27,28,35,40,43,44,46,47,50,51.		56.86
Permissible to Doubtful	13.		1.96
Doubtful to Unsuitable	3,5,9,11,19,25,34,39,41,45,49.		21.57
Unsuitable	29,30,31,32,33,36,37,38,42,48.		19.61

Table 4. Spatial Distribution Results Based on Wilcox Diagram

S.No.	Category of Irrigation Water	Area in Km ²
1	Excellent to Good	-
2	Good to Permissible	181.51
3	Permissible to Doubtful	12.41
4	Doubtful to Unsuitable	105.84
5	Unsuitable	46.64

Table 5. Groundwater Classification Based on USSL Diagram Interpretation (1954)

S. No.	Category	Pre (Locations samples)	Monsoon	Percentage (%)
1	C2-S1	47.		1.96
2	C3-S1	1,4,6,7,8,10,12,13,14,15,16,17,18,20,21,22,23,24,25,26,27,28,35,40,42,43,44,45,50,51.		58.82
3	C4-S1	2,3,5,9,32,41,46,49.		15.69
4	C4-S2	11,19,29,31,33,37,38,48.		15.69
5	C4-S3	30,34,36,39.		7.84

Table 6. Spatial Distribution Results Based on USSL Diagram

S.No.	Category	Area in Km ²
1	C3-S1	213.68
2	C2-S1	16.80
3	C4-S1	56.05
4	C4-S2	56.82
5	C4-S3	3.06

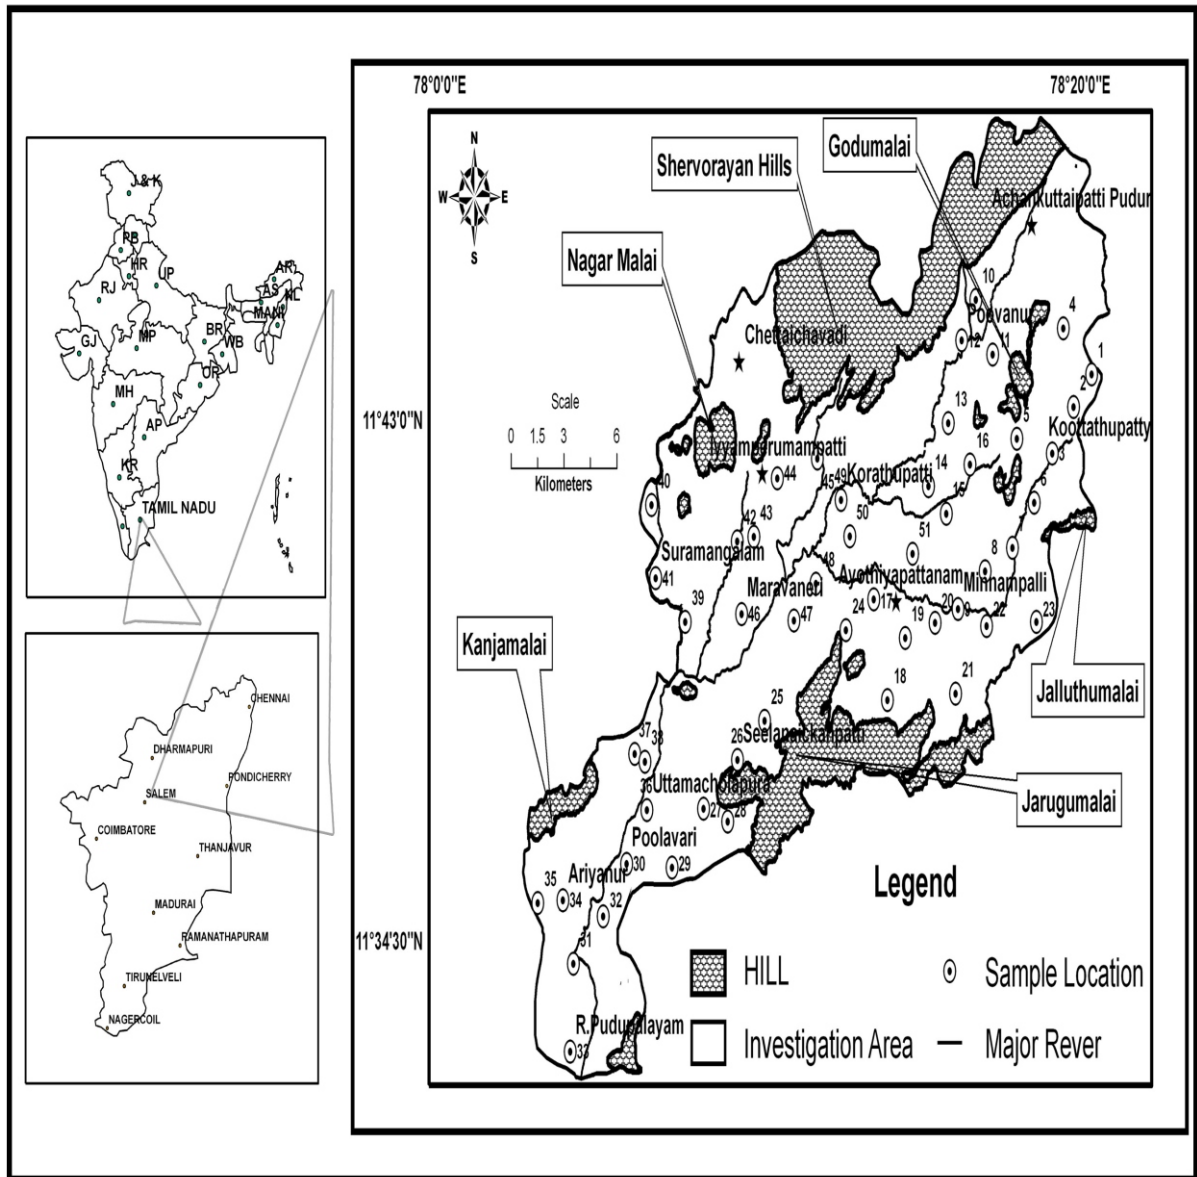


Fig.1. Study Area Upper Thirumanimathar Sub-basin and Groundwater Sample Locations

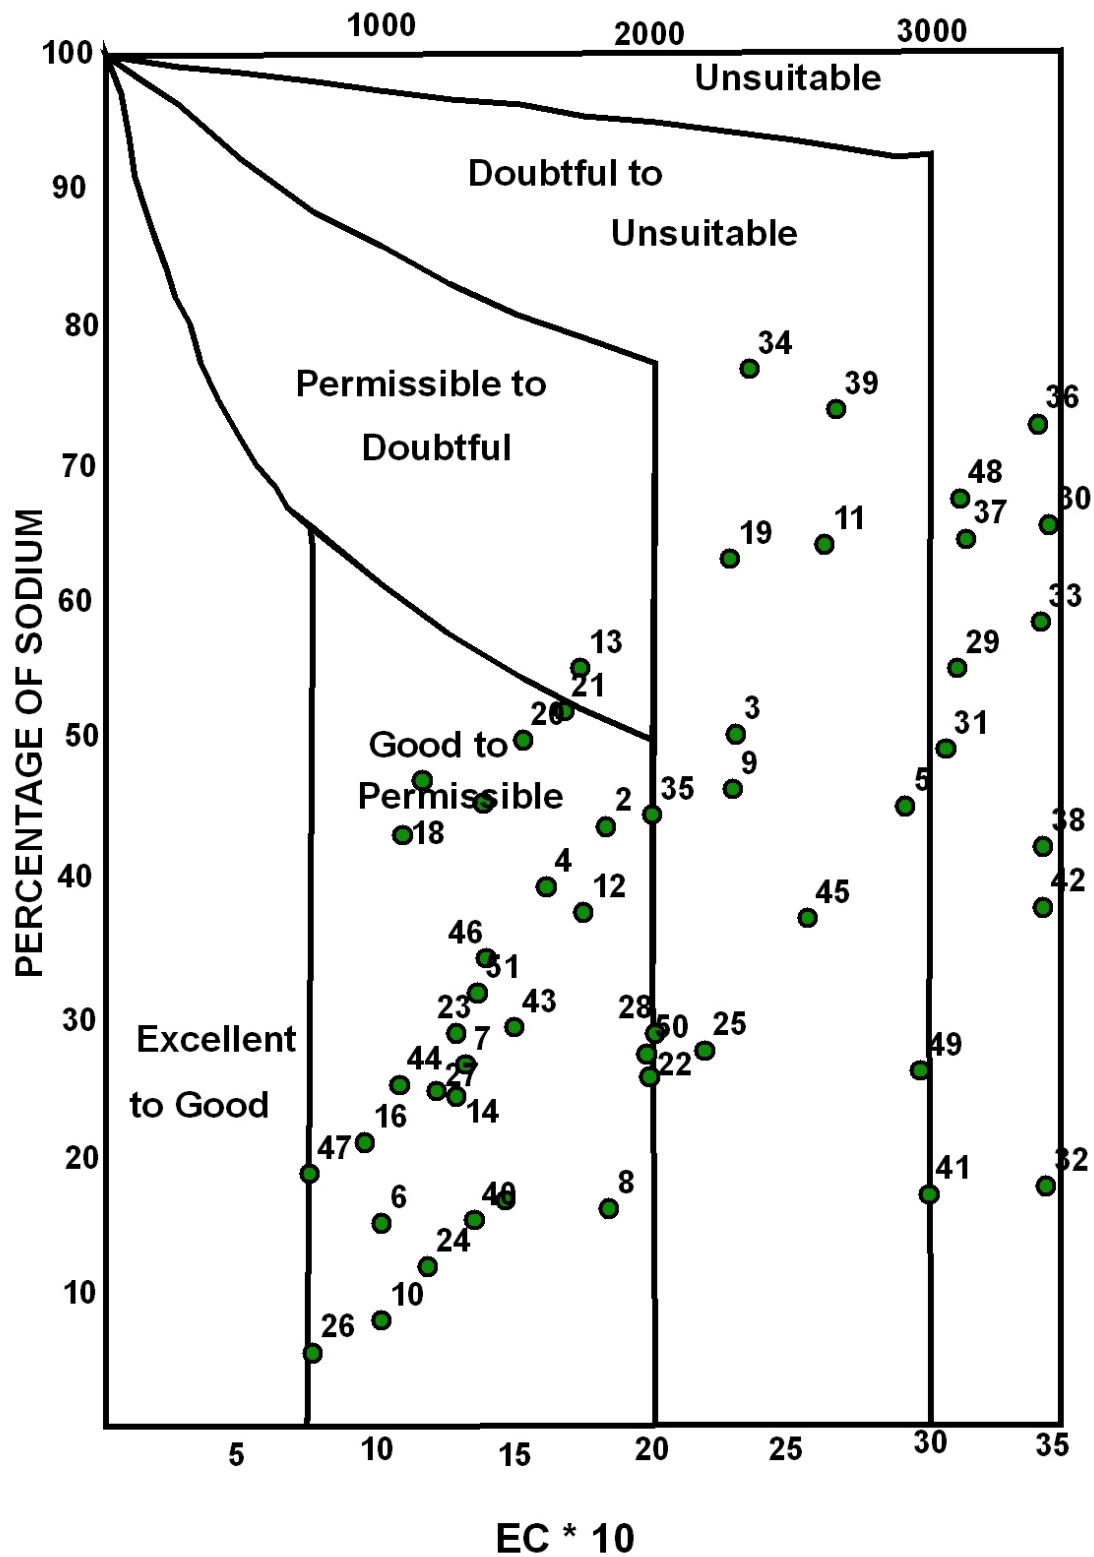


Fig.2. Wilcox diagram

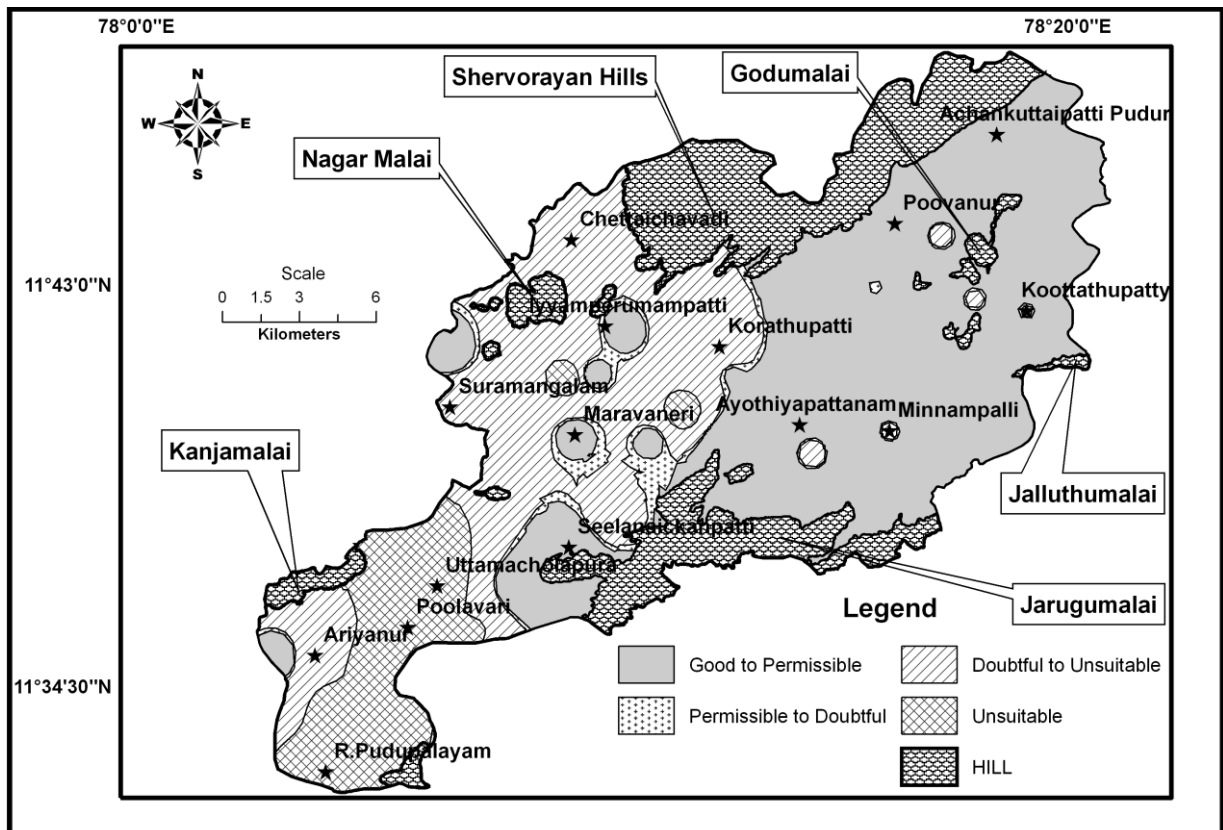


Fig.3. Spatial Distribution map based on Wilcox diagram Result

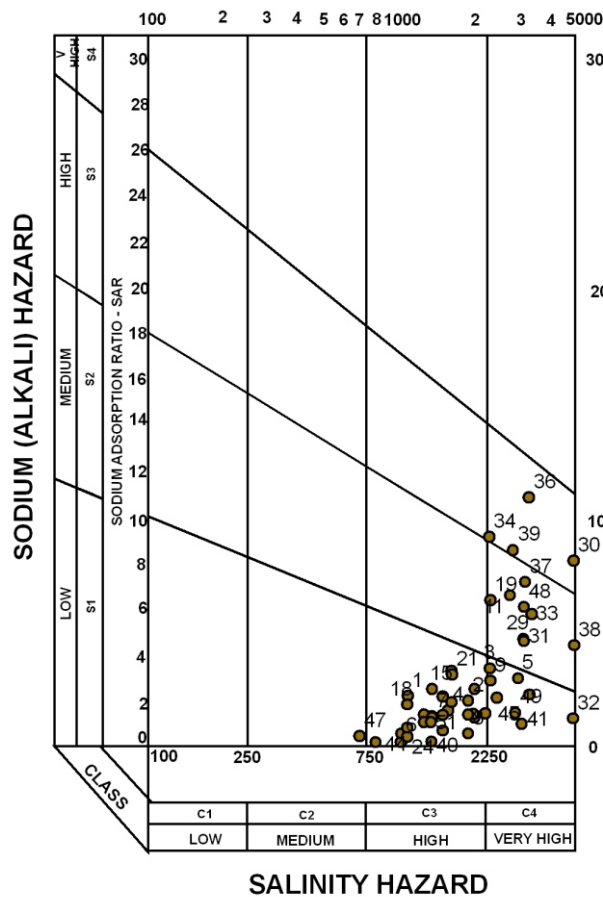


Fig.4. USSL Diagram

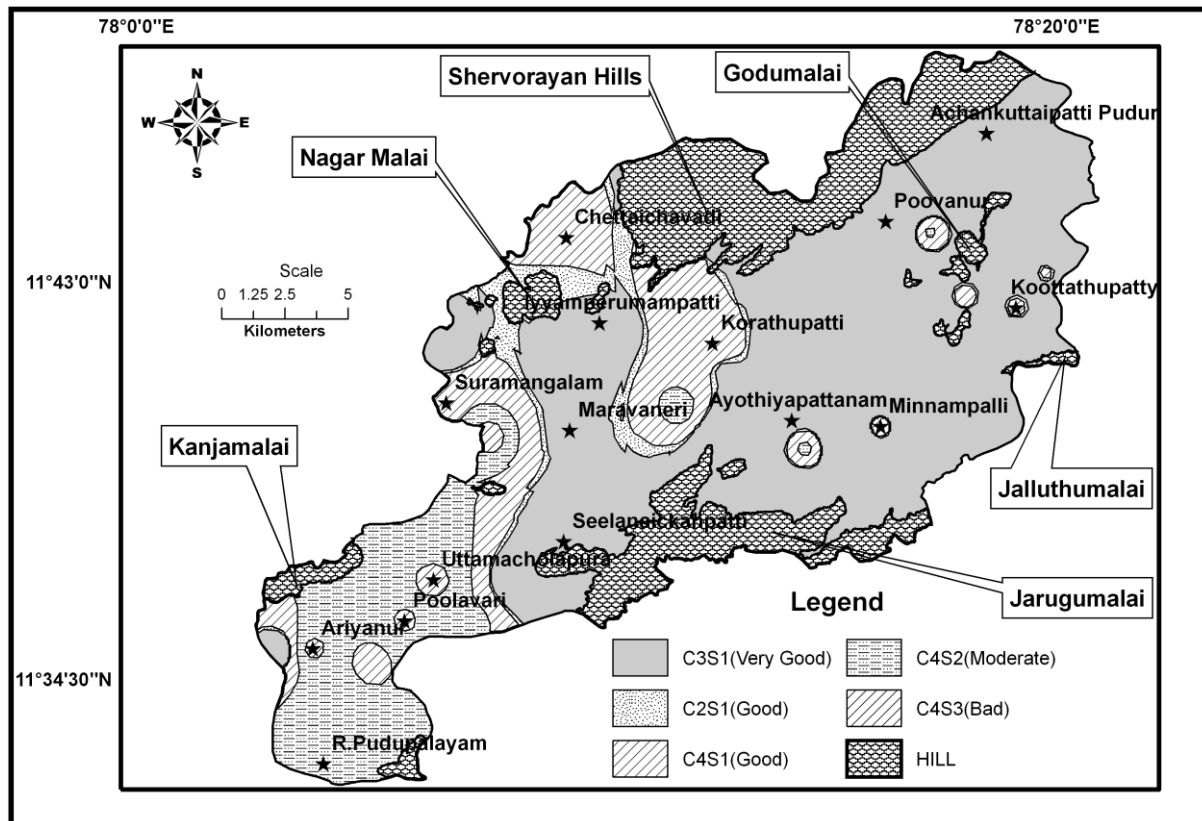


Fig.5. Spatial Distribution map based on USSL diagram Result